



STELLAR LIGHTING

www.stellarlighting.co.uk

Intelligent Stair Lighting

Product Information





Intelligent stair lighting

These motion sensor-activated LED stair lights switch on automatically to light up your stairs when you reach the top or bottom step.

Why choose Stellar Lighting's stair lights?

| | |
|-----------------------|---|
| Flexible options | <ul style="list-style-type: none">• Adaptable solution for different types of stairs• Sets can be built into new constructions or existing stairs• Variety of options for quantity and size |
| Colour choices | <ul style="list-style-type: none">• Customisable options to match the surrounding design• Light colour options: cold white, warm white, natural white, red, green or blue• Profile colour options: silver, pine, wenge, white, gold or black |
| Energy efficient | <ul style="list-style-type: none">• Energy efficient LED lights• 50,000 hours of life expectancy for the LED lights• Lights are only on when required |
| Elegant and practical | <ul style="list-style-type: none">• Aesthetic design• The lighting effect makes the stairs an architectural feature of the space• Even illumination of the stairs, regardless of the width of the steps.• Sets are easy to install and use (installation requires a qualified electrician) |
| Smart automation | <ul style="list-style-type: none">• Programmable control unit to adjust the lighting conditions to your preferences and the needs of your environment• Lights turn on and off automatically when required• Adjustable brightness and dimming speed |
| Made in Europe | <ul style="list-style-type: none">• Manufactured in the EU, to the highest quality standards• CE certified products• 2 year warranty (if installed by a qualified electrician)* |



Complete set content

What are the components of the stair lighting kit?



- Intelligent stair lighting touchpad control unit (SCR1 or SCR2)
- Terminal blocks: 5 x 4way, 1 x 3way, 2 x 3way (small ones for sensors)
- For linear LED light strip option:
 - LED stair lighting strips with 1 m, two-core wire tails
 - Aluminium profile and end caps for each light strip with diffuser
- For wall recessed spotlight option:
 - LED spotlights with back boxes
- Motion sensors (with 10 m three-core cable)
- Power supply unit
- DIN rail
- Timer (optional)
- Installation instructions

We also supply controllers and motion sensors (either with or without a power supply) independently of the rest of the kit for customers who prefer a different design of light.



Stair lights

Important notes on installation and warranty!

All electrical works must be carried out by a fully qualified, registered electrician in accordance with both the UK 17th Edition Wiring Regulations and the manufacturers' instructions. Please note that we are unable to refund or replace any item deemed faulty unless it has been installed by a fully qualified electrician, registered to one of the UK's five trade bodies: NICEIC, NAPIT, ECA, ELECSA, JIB. When returning a faulty item we require full details of the installing electrician in order to verify the integrity of both the installation and electrical wiring system including fuse board and circuit protection devices.

Please read more about warranty in our [Terms & Conditions](#).

Linear stair light specifications

| | Standard LED strip | COB LED strip |
|----------------------------|-----------------------------|-------------------------|
| Model | SMD 3528 / 2835 | LED SWW320F008W12-COB-A |
| Length | 90 cm | 90 cm |
| LEDs/m | 60 | 320 |
| Lifespan | 50,000 hours | 100,000 hours |
| Light colour | warm / cold / natural white | Natural white |
| Energy consumption | 4.8W/m | 6 W/m |
| Rated voltage | 12 VDC | 12 VDC |
| Width | 8 mm | 8 mm |
| Length of connecting wires | 1 m | 1 m |
| IP rating | IP 20 | IP 20 |



Warm white



Natural white



Cold white



Stair lighting profiles

| | | |
|------------------|--|--|
| Length | 60 cm / 90 cm | |
| Profile material | Aluminium | |
| Profile finish |  Milk finish |  Transparent finish |
| |  Silver |  Pine |
| Profile colour |  Wenge |  White |
| |  Gold |  Black |



Stair lighting profiles


| Profile type | | | | |
|------------------|--|--|---|---|
| | Standard | Angular | Recessed | Recessed slim |
| | Standard fitting which can be mounted even on finished stairs. | Mounted in the corner between the stair tread and the riser. | The profile is hidden in a cut under the step. A popular choice for customers who have not finished their stairs yet. | The profile is hidden in a cut under the step. Suitable for stairs where the wider recessed option is too wide. |
| Profile end caps | | | | |
| | Standard | Angular | Recessed | Recessed slim |
| | Adds 1.5 mm in length to each end of the profile | Adds 1.5 mm in length to each end of the profile | Adds 10 mm in length at the top and 9 mm on the underside to each end of the profile | Adds 15 mm in length at the top and 8 mm on the underside to each end of the profile |




Stair lights

Surface-mounted / wall recessed spotlight specifications

| | |
|--------------------------------|--|
| Dimensions for spotlights | Round: 65 mm diameter |
| Colour options | Black, white, brushed steel |
| Lighting stream | 200 lm |
| CRI – rate of colour rendering | ≥ 80 |
| Energy class | A++ |
| Number of cycles (on/off) | $\geq 15,000$ |
| Light colour and temperature | cold white / neutral white / warm white |
| Dimmable | Yes |
| Energy consumption | 2 W |
| Power supply | 12V DC (Constant voltage) |
| Installation | Suitable for surface mounted and recessed installation methods |



Surface-mounted dimensions



Flush-mounted dimensions



Black frame



White frame



Silver frame



Stair lights

Mini spotlight specifications

| | |
|--------------------------------|---|
| Dimensions for spotlights | Round: housing size 20 mm Ø x 25 mm with cut hole 15 mm Ø |
| Colour options | Black, white, silver |
| Lighting stream | 95 lm |
| Beam angle | 30° |
| CRI – rate of colour rendering | >=80 |
| Energy class | F |
| IP rating | 65 |
| Lifespan | 35,000 hours |
| Light colour and temperature | cold white / neutral white / warm white |
| Dimmable | Yes |
| Energy consumption | 1 W |
| Power supply | 12V DC (Constant voltage) |
| Installation | Suitable for recessed installation methods |





Stair lighting controller

The control unit has settings for light intensity, light duration and dimming speed. We offer two models: SCR1 switches on all lights simultaneously, while SCR2 switches each step individually, giving a sweeping effect up or down, depending whether the lower or upper sensor has been activated.

| Specification | SCR1 | SCR2 |
|-----------------------------|--|---|
| Max power | 200 W | 20 x 9.6W |
| Output voltage | DC 12 V – 24 V | |
| Dimensions of control panel | 103 x 87 x 66 mm | 140 x 89 x 63 mm |
| Ingress protection | IP20 | |
| Housing material | Plastic | |
| Number of step control | Up to 200W | 2-20 steps |
| Functions | <ul style="list-style-type: none"> • automatically switching on and off the lights • lighting time adjustment between 5-120 seconds • continuous lighting when motion sensors are turned off • light intensity adjustment (lighter / darker) • 50 cm cable included to allow easy connection to the power source or timer • suitable for mounting on a 35mm DIN rail | |
| Additional feature | <ul style="list-style-type: none"> • all lights turn on / off simultaneously | <ul style="list-style-type: none"> • lights turn on / off individually • lights start turning on at both ends if both motion sensors are triggered • Daylight sensor option • Push wall switch connectivity |





Stair lighting power source

A 150 W and a 100 W power supply options is available with the stair lighting system.

| Model | DIN100W12 | HDR-150-12 |
|------------------------------|-----------------------|-------------------------------------|
| Dimensions | 100 x 93 x 56 mm | 105 x 90 x 54,5 mm |
| Weight | 0.31 kg | 0.31 kg |
| Output | | |
| Rated voltage | 12 V | 12 V |
| Rated current | 8.3 A | 11,3 A |
| Rated power | 99.6 W | 135,6 W |
| Voltage Adjustment Range [4] | 10.8 - 13.8 V | 10.8 - 13.8 V |
| Line regulation | ± 1% | ± 1% |
| Load regulation | ± 1% | ± 1% |
| Input | | |
| Voltage range | 180 - 264 VAC | 85 ~ 264VAC (277VAC operational) |
| Frequency range | 47 - 63 Hz | 47 - 63 Hz |
| Efficiency | 87% | 89% |
| AC current | 1.3 A / 230 VAC | 1.6A / 230VAC |
| Inrush current | 40 A / 230 VAC (25°C) | COLD START 35A/115VAC 70A/230VAC |





Stair lighting power source

| Model | DIN100W12 | HDR-150-12 |
|----------------------------------|--|---|
| Protections | | |
| Overload | 110 - 160% rated power | 105 - 135% rated output power |
| | Type: hiccup mode. Recovers automatically after fault condition is removed | Protection type: Constant current limiting, recovers automatically after fault condition is removed |
| Over voltage | 16 - 23V | 14.2 - 16.2V |
| | Type: shut off output voltage. Re-power on to recover. | Protection type : Shut down o/p voltage, re-power on to recover |
| Environment | | |
| Working temperature | -20°C - 50°C | -30°C - 70°C |
| Working humidity | 20 - 98% RH non-condensing | 20 - 90% RH non-condensing |
| Storage temperature and humidity | 30°C - 70°C, 10 - 98% RH non-condensing | 40°C - 85°C, 10 - 95% RH non-condensing |
| Temperature coefficient | ± 0.05% / °C (-20°C - 45°C) | ± 0.03% / °C (0°C - 45°C) |
| Vibration | 10 – 500 Hz, 2G, 10min / cycle, period for 30min. each along X, Y, Z axes | 10 – 500 Hz, 2G, 10min / cycle, period for 60min. each along X, Y, Z axes |




Motion sensors

Intelligent motion sensors switch the lights on when someone passes them directly. The motion sensors are designed to have a range of 1 m – 1.3 m, though this can depend on factors such as temperature and humidity. Special attention should be paid when positioning the motion sensors to ensure they are not triggered while walking past the stairs.

Sensor options

| Specifications | Option 1 | Option 2 | Option 3 |
|----------------|--|--|----------------------------------|
| Mounting | Flush mounted* | Surface mounted | Baluster / post mounted |
| Colour | White | Light grey | Black |
| Dimensions | Faceplate: 7.2 cm Depth: 4.8 cm, Tube 6.3 cm | Height 4.5cm x width 1.5cm x thickness 1.6cm | Diameter 4cm, thickness 1.4cm |

*comes with a round back box, that slides on to the sensor

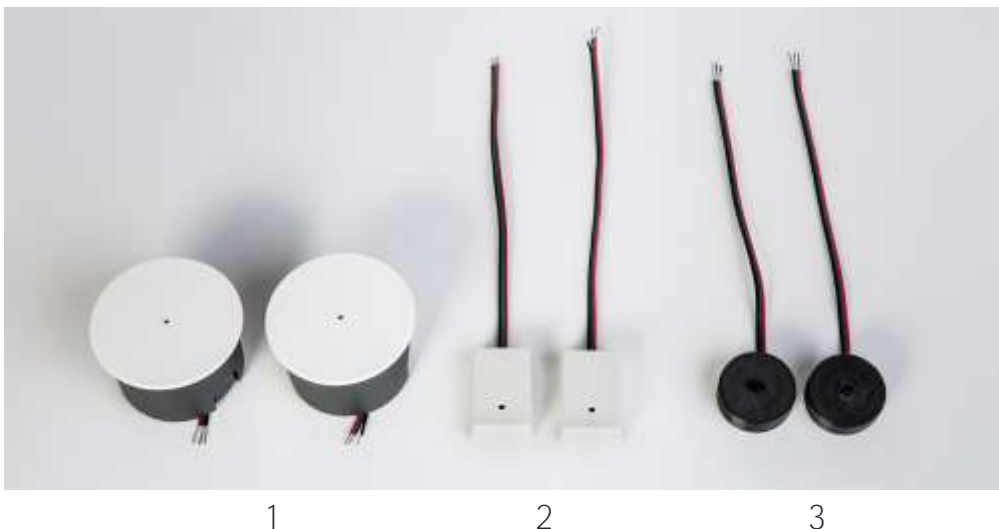

The motion sensors come with 10 m of three-core cable to allow easy connection to the controller.



Timer (optional)

The digital timer switches the stair light's controller on or off at selected times or days. This can prevent the stair lights from illuminating during the daytime, when you have sufficient natural light.



Main features:

- Up to 10 different programs
- The timer is suitable for mounting on a 35 mm DIN rail.
- Digital display with clock
- 50 cm cable included for easy connection to the power supply

Technical specifications

| | |
|-----------------------|--|
| Dimensions | 36 mm (width) 85 mm (length) 56 mm (depth) |
| Voltage | 230 V (50 Hz) |
| Max load | 16 A, 300 W |
| Minimum timer setting | 1 minute |
| Operating temperature | from -10 ° C to + 40 ° C |
| Accuracy | +/- 1 min per month |
| Battery life | NIMH 1.2 > 100 h |



Accessories (optional)

The Intelligent Stair Lighting system's components come with the cables described in the specifications above. The following accessories are available when purchasing the Intelligent Stair Lighting sets.



Two-core cable

- For connecting the LED light strips to the controller (SCR 1 or SCR 2)
- Minimum length 1 m
- Cross-section 2 x 0.45 mm²



Three-core cable

- For connecting the motion sensors to the controller (SCR 1 or SCR 2)
- Minimum length 1 m
- Cross-section 3 x 0.33 mm²



Wago quick connector clip

- The connectors allow the quick and easy connection of cables without the need for a screwdriver or soldering kit



Enclosure

- The connectors allow the quick and easy connection of cables without the need for a screwdriver or soldering kit

If you have any questions or comments regarding our products, please contact us on

info@stellarlighting.co.uk



STELLAR LIGHTING

www.stellarlighting.co.uk